

# Electric chain hoist SEK for loads up to 2,000 kg



Electric chain hoist SEK



In our SEK series, we have packed high-performance motors into a compact and rugged design. The easy to install hoists guarantees long service life, reliable operation and low maintenance costs. Proven European technologies, DIN based hooks with safety latch and DAT class grade 80 chain supports the SEK series with high quality. The hoist body is protected from the hook block with a large rubber buffer. A slipping clutch limits the end positions and the maximum load. The hoists are available with upper hook suspension, push and motor trolley. These high quality chain hoists are particularly suitable for a wide range of applications.

## Standard equipment:



- Single lift speed
- Single trolley speed (10 m/min, 50 Hz)
- Contactor controls
- Motor performance 50% ED, 300 start/hour
- Push button pendant with Emergency-Stop & strain relief cable
- Black extruded polyethylene chain container
- 3 m lifting height
- Slipping clutch
- Upper hook
- Protection mode IP55
- Surface protection: powder coating, resin epoxy polyester, 70 µm
- Asbestos free disc brake

## Options:



- Push trolley
- Motor trolley drive
- Other lifting heights





# Electric chain hoist SEK for loads up to 2.000 kg. Efficient and economical usage with the highest quality.




Load kg	Type OH	Chain size mm	C mm	L1 mm	L2 mm	BC mm	BC1 mm	BC2 mm	B1 mm			
250	SEKa 040.11	6x18	399	238	290	496	165	150	137			
500	SEKa 040.11	6x18	399	238	290	496	165	150	137			
1.000	SEKb 040.11	8x24	486	275	353	548	198	150	153			
2.000	SEKb 080.21	8x24	570	275	353	548	237	180	117			



Load kg	Type FND	Chain size mm	C mm	L1 mm	L2 mm	BC mm	BC1 mm	BC2 mm	B1 mm	B2 mm	F mm	H mm
250	SEKa 040.11	6x18	461	238	290	558	165	150	137	206	50-310	66
500	SEKa 040.11	6x18	461	238	290	558	165	150	137	206	50-310	66
1.000	SEKb 040.11	8x24	598	275	353	630	198	150	153	242	65-310	76
2.000	SEKb 080.21	8x24	667	275	353	645	237	180	117	288	65-310	92



Load kg	Type FNE	Chain size mm	C mm	L1 mm	L2 mm	L3 mm	BC mm	BC1 mm	BC2 mm	B1 mm	B2 mm	F mm	H mm
250	SEKa 040.11	6x18	403	238	290	339	500	165	150	137	281	55-310	117
500	SEKa 040.11	6x18	403	238	290	339	500	165	150	137	281	55-310	117
1.000	SEKb 040.11	8x24	467	275	353	339	529	198	150	153	281	55-310	117
2.000	SEKb 080.21	8x24	573	275	353	339	551	237	180	117	320	55-310	126

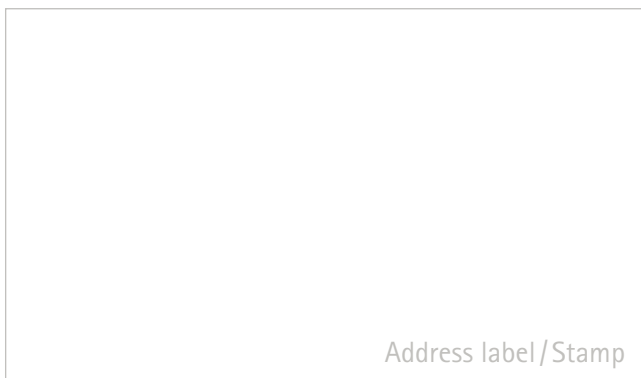

# Look ahead!